

RE-Cycle: a profitable swine production system with zero waste

Theo van Kempen, North Carolina State University, Raleigh, NC 27695, T_vankempen@ncsu.edu

Technology Partners:


Belt design: Preston Burnette, Brett Kaspers, and Jeanne Koger, NCSU

Gasification/liquefaction: Deola Ali, Preston Burnette, Jeanne Koger, and Jerry Spivey, NCSU

Ammonia recovery process: Paul Loeffler, Sam Houston State University,

and Alex Fassbender, ThermoEnergy, Inc. (www.thermoenergy.com)

Economic evaluation: Tullaya Boonsaeng and Ada Wossink, NCSU

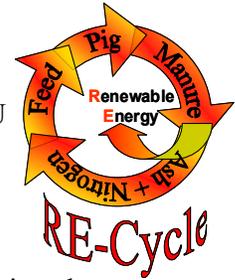

Introduction

Traditionally, swine production and crop production were tightly integrated. Swine were raised on crop residues, and their manure was a valuable fertilizer. Over the past 40 years, however, both crop producers and swine producers have moved away from this integration in an effort to reduce production costs. Crop producers prefer 'pure' fertilizers that are easy and accurate to spread, while swine producers prefer to hold animals in large groups in close proximity to feed mills and slaughter plants. Feed ingredients are often imported from distant regions making it financially prohibitive to return the highly dilute manure to the crop-growing areas. Thus, manure ends up being used locally, sometimes at application rates that exceed crop requirements.

This type of swine production has raised environmental concerns and some environmentalists push for a reintegration of crop and swine production through a return to much smaller, diversified family farms. Although components of the RE-Cycle system can facilitate such a movement, the RE-Cycle system is really meant as a solution for the environmental concerns of very large, integrated swine facilities.

The RE-Cycle system is designed to convert waste into value added products (Figure 1). Fecal material is converted into energy and ash. The energy can be captured in the form of electricity or a liquid fuel such as diesel or ethanol. The sterile ash has been successfully used as a mineral supplement in swine feed, eliminating phosphorus as an environmental concern. Nitrogen is recovered and processed into commercial grade nitrogen fertilizer, eliminating nitrogen as an environmental concern.

The components that make up the RE-Cycle system are all based on existing technology and can be used independently of each other. Central to the system is a modified swine housing system in which a conveyer belt is used for separating urine and feces in the house itself, substantially reducing ammonia and

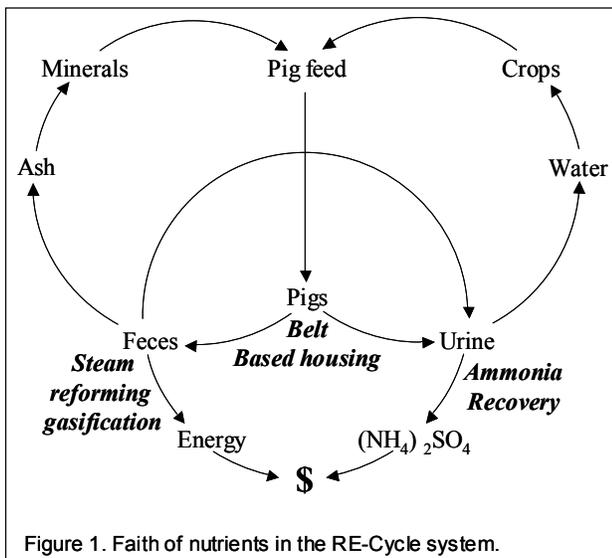


Figure 1. Faith of nutrients in the RE-Cycle system.

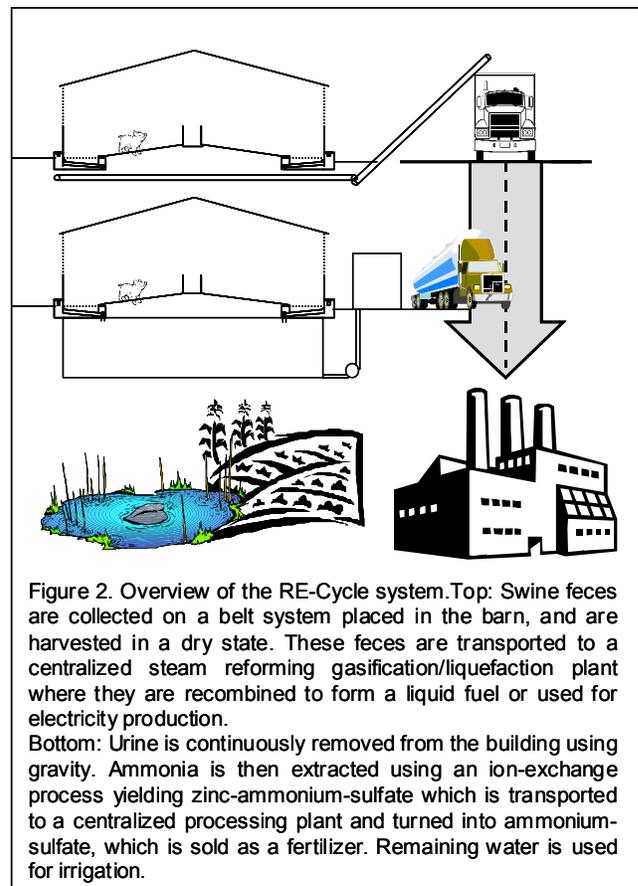


Figure 2. Overview of the RE-Cycle system. Top: Swine feces are collected on a belt system placed in the barn, and are harvested in a dry state. These feces are transported to a centralized steam reforming gasification/liquefaction plant where they are recombined to form a liquid fuel or used for electricity production.

Bottom: Urine is continuously removed from the building using gravity. Ammonia is then extracted using an ion-exchange process yielding zinc-ammonium-sulfate which is transported to a centralized processing plant and turned into ammonium-sulfate, which is sold as a fertilizer. Remaining water is used for irrigation.

odor emission. Urine is processed on the farm through a reversible chemisorption system for extraction of ammonia. The extracted ammonia is processed centrally into commercial-grade fertilizer. Partially dried feces are also shipped to this central processing facility for energy recovery.

A schematic overview of the RE-Cycle system is shown in Figure 1, and a more detailed description of each of the steps in the system is provided below.

Conveyor-belt based swine housing.

Conveyor belts have been used in the laying hen industry for approximately 30 years with good success. They require minimal intervention, last 8 to 10 years, and allow for the poultry waste to be collected in a dry form with minimal ammonia and odor emission. The major challenge with pigs is that pigs produce a large volume of urine, which has to be separated from the feces. To achieve this, the belt should be placed at an angle such that the urine runs away from the feces.

Typical behavior of pigs is to defecate against back walls of pens or against open partitions between pens, and this behavior can be utilized in constructing a belt-based housing system. Using a partially-slatted housing system as a starting point, belts with a width of approximately 2m are placed in the existing flush-gutter such that the highest end of the belt is against the back wall, sloping inward at approximately 4° (Figure 2). At the low end of the belt, a gutter is installed below the belt or the belt is bent back upwards to generate a urine gutter. The advantage of a separate gutter is that ammonia emission can be maximally reduced, but the disadvantage is that solids (especially spilled feed) can settle in the gutter leading to clogs and odor. The advantage of the gutter integrated in the belt is that the gutter is cleaned whenever the belt operates. However, the gutter residue can lower the dry matter content of the feces collected.

For an optimal climate in the swine barn, it is paramount that the urine be removed from the barn as soon as possible. This is because fecal contamination of urine results in the breakdown of urea to form ammonia, which can be volatilized. Ammonia has a negative effect on animal and worker health and well-being and has been implicated in eutrophication. In buildings that are placed on a slope and that use the above belt design, the urine continuously flows out of the building.

Research has shown reductions in ammonia of 65 to 80% depending on the extent of pen fouling. Actual ammonia concentrations measured in a facility with a ventilation rate of approximately 50 m³/h/pig place were 2-3 ppm. A benefit of removing urine from the building is a marked reduction in odor as odor is linked to aging urine. In experiments with the belt, this has resulted in a 5% improvement in feed efficiency compared to animals in conventional facilities.

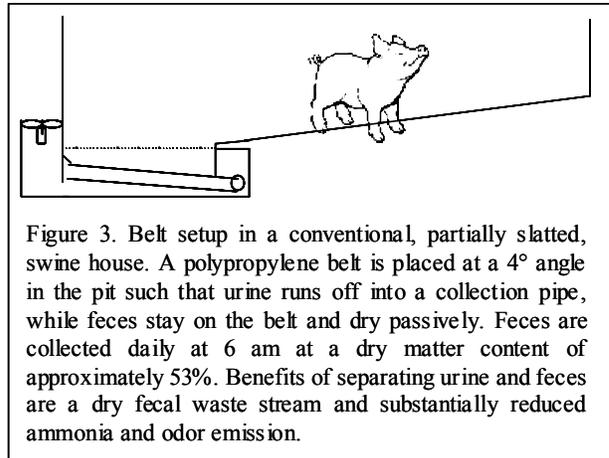


Figure 3. Belt setup in a conventional, partially slatted, swine house. A polypropylene belt is placed at a 4° angle in the pit such that urine runs off into a collection pipe, while feces stay on the belt and dry passively. Feces are collected daily at 6 am at a dry matter content of approximately 53%. Benefits of separating urine and feces are a dry fecal waste stream and substantially reduced ammonia and odor emission.

To harvest the feces with the highest dry matter content possible, it was originally believed that the residence time on the belt was of importance. The longer the feces sat on the belt, the more time it had to dry. This assumption turned out to be false. After a day, feces accumulate on the belt to a point that urine does not run through it freely, trapping the urine and creating puddles. What was observed, however, was that the time of collection was of major importance. Feces collected late in the afternoon were the wettest; those collected early in the morning, the driest. The reason for this is simple. Pigs are asleep most of the night and thus don't urinate. During this time the feces dry. During the day, the pigs urinate decreasing the dry matter content of the feces. Harvesting feces at 6 am has proven very effective, with dry matters averaging 53%. At this point the feces are dry to the touch, don't clump, and are stable when stored. In a commercial setting, these feces can be conveyed to a truck bed for collection or to a composting shed.

In summary:


- Feces are collected at approximately 53% dry matter
- Urine is continuously removed from the house
- Odor and ammonia emissions are minimized

- Belt systems are easy to construct and allow for multi-story swine housing systems
- Belts offer environmental benefits on farms of all sizes

Steam reforming gasification and liquefaction

Steam reforming gasification is a form of thermal decomposition in an environment with limited or no oxygen. The concept is that material is indirectly heated to very high temperatures, for example, 800°C, at which point organic material decomposes into gases such as H₂, CO, CO₂, and CH₄, and ash containing minerals. A benefit of this process is that any bio-active compound, such as antibiotics, prions, or viruses, should be destroyed.

The steam reforming gasifier used for research at NCSU uses an entrained flow principle. The swine feces are injected into a spiral tube while suspended by superheated steam and some recycled product gas (Figure 3). This tube surrounds an intense flame, and while traveling up this tube the material is heated to 800°C and decomposes. The reason for co-injecting product gas is to propel the material through the tube. Steam is injected so it can react with fecal material resulting in H₂ production. In principle, the reaction occurring is as described below. In practicality, other product gases such as CO₂, CH₄, H₂S, and NH₃ are formed as well.



At the exit of the decomposition tube, the product gas is separated from the mineral ash using

cyclones and gas cleaners. The product gas has a combustion value similar to low grade natural gas and can be used to fuel a generator or micro-turbine for the production of electricity. This is only a viable option if a market is available for electricity.

Another possibility is to catalytically recombine these gases to produce products such as ethanol or diesel. This is typically achieved by compressing the gases and injecting them at a high temperature into a matrix of, for example, molybdenum sulfide for the production of ethanol or iron silicon dioxide for the production of diesel. This option is technically and financially (higher investment) more challenging but as fuels are produced that can be stored and transported, it may be the preferred option in situations where there is no market for electricity.

The steam reforming gasifier does not require external energy for its operation. Instead, a portion of the product gas or, in the case of catalytic conversion of product gas to liquid fuels, unreacted product gas, is used to fuel the burner that generates the heat to sustain the process. Thus, the entire process is self-sustaining and equally important, the process does not produce any air emission of noxious compounds such as dioxins.

In summary:

- Any dry organic material, including swine feces, can be converted to electricity or a liquid fuel
- The process does not produce harmful emissions
- The only byproduct is a sterile ash well suited for use as a mineral supplement in swine feed

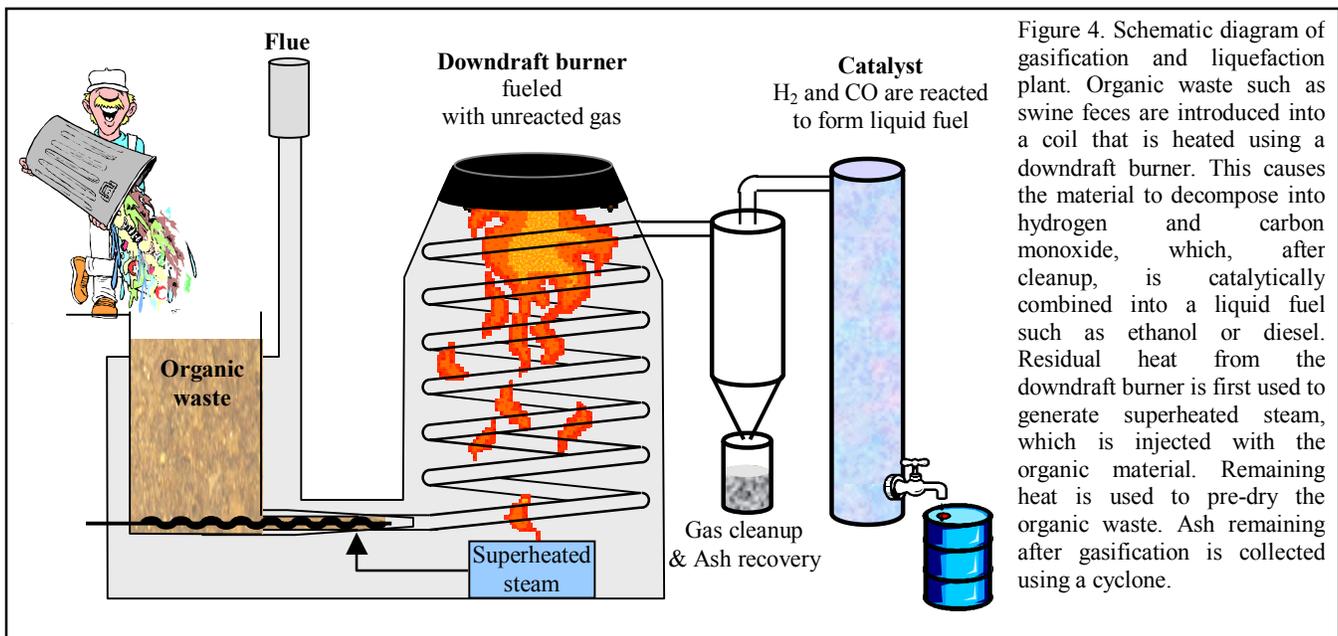


Figure 4. Schematic diagram of gasification and liquefaction plant. Organic waste such as swine feces are introduced into a coil that is heated using a downdraft burner. This causes the material to decompose into hydrogen and carbon monoxide, which, after cleanup, is catalytically combined into a liquid fuel such as ethanol or diesel. Residual heat from the downdraft burner is first used to generate superheated steam, which is injected with the organic material. Remaining heat is used to pre-dry the organic waste. Ash remaining after gasification is collected using a cyclone.

Recycling of ash

Using grower feed as a starting point, approximately 15% of the feed mass is converted to dry swine feces. Upon steam reforming gasification, approximately 13% of the fecal mass is converted to ash. Thus, per kg of grower feed 20 grams of ash are produced, or 2%. This ash contains most of the minerals that were in the swine feces in either oxide or carbonate form. Exceptions are sulfur, chloride, and nitrogen, which are trapped in the wash liquid of the product gas. The ash (composition in parenthesis) is rich in elements such as Ca (11.5%), P (13.3%), and Mg (5.8%) as these minerals are predominantly excreted in the feces. Sodium (2.8%) and potassium (12.2%) are mainly excreted in the urine and they are not the predominant minerals in feces.

The ash recovered from the gasifier has been exposed to temperatures of 800°C and is thus sterile. Therefore, from a disease perspective it is perfectly safe to feed this ash back to pigs.

The mineral digestibility of the ash has been evaluated both in pigs and under lab conditions. Results of both assays were in agreement and showed that the digestibility of minerals in ash was practically equivalent to the mineral digestibility in commercial sources of these minerals (for example, limestone and dicalcium phosphate). This means that the ash becomes a value-added product in the RE-Cycle system.

Formulating a diet based on this ash composition showed that, for grower pigs, the inclusion in the diet of 2% ash (treated with hydrochloric acid to reduce the pH and provide chloride), 0.15% salt, and 0.6% limestone provided all the macro and micro minerals needed by the pig. At this inclusion rate, a nearly perfect balance exists between ash production and ash utilization. Thus, the RE-Cycle system is expected to not have a

significant net surplus or deficiency of phosphorus.

In summary:


- Ash from gasification contains high levels of calcium and phosphorus, which is highly digestible, making it a suitable mineral source for swine
- The ash produced in the RE-Cycle system matches the requirement for inorganic phosphorus of the pigs that are part of the RE-Cycle system

Recycling of nitrogen

Pigs excrete approximately 70% of waste nitrogen in urine, mainly in the form of urea. It is this urea that is broken down quickly to result in ammonia emission in conventional swine housing systems. By minimizing contact between the urine and the feces and by removing the urine from the house as soon as possible, ammonia emission can be prevented.

This urine is a good source of nitrogen fertilizer, but as collected it is rather dilute, unstable, and smelly (after short-term storage), making land application not an ideal solution except when using an injection system under dry weather conditions. An alternative method for managing the nitrogen is to nitrify/denitrify it, as is done in many municipal waste-treatment plants. In such a system bacteria first oxidize the ammonia to form nitrates, and then, in a second step, reduce the nitrate to N₂ gas. Nitrogen gas makes up 80% of the atmosphere and can be safely released into the atmosphere. Although technically a good option, this process does not produce any value-added products and results in the loss of a valuable resource, fertilizer N.

An alternative solution is to trap the ammonia from urine using, for example, a reversible chemisorption system such as the Ammonia Recovery Process or ARP (Figure 4). This ARP consists of a

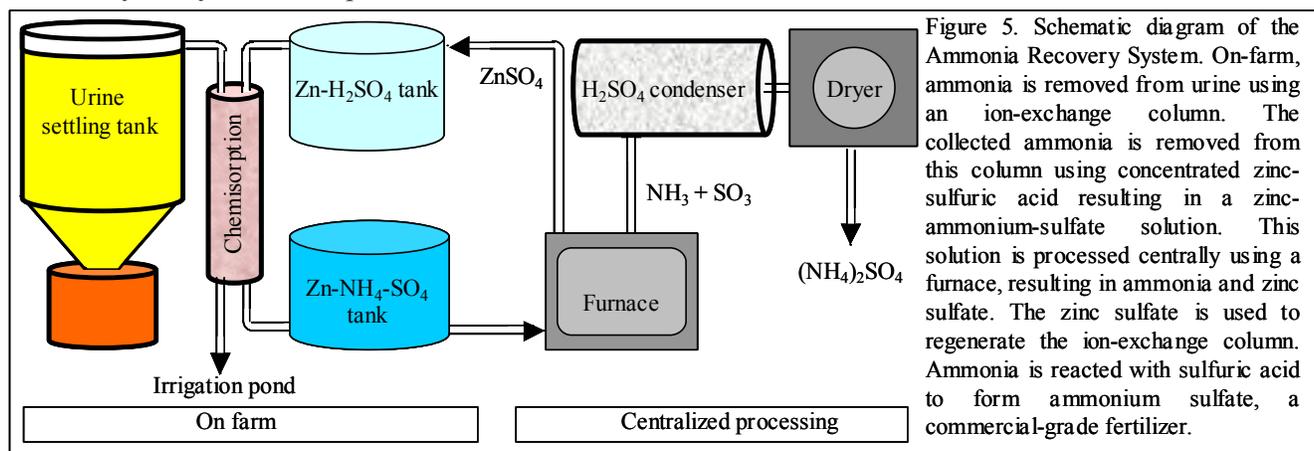

column containing a zinc-based resin that reversibly binds ammonia. When urine passes through this column, nearly all of the ammonia (up to 99.7%) binds to the column, and the remaining 'urine' can be used as irrigation water since it is virtually free of nitrogen and phosphorus. Ammonia that is bound to the column is periodically removed by flushing the column with a strong acid solution. The resulting solution of zinc-ammonium-sulfate is transported to a centralized processing facility.

The remaining 30% of the nitrogen excreted by the pigs ends up in the steam-reforming gasifier. There it is also converted to ammonia gas, which is trapped in the gas cleanup. Both the zinc-ammonium sulfate solution and the ammonia from the gasifier are introduced into a furnace (using residual heat from the steam-reforming gasifier), resulting in the production of ammonia gas and zinc sulfate. The zinc sulfate is returned to the farm for regeneration of the ion-exchange column. Ammonia is trapped in a scrubber column loaded with sulfuric acid, and the resulting solution of ammonium sulfate is dried to form fertilizer-grade ammonium sulfate.

In summary:

- Nitrogen in urine can be converted to harmless nitrogen gas
- Nitrogen can be recovered using an ion-exchange system after which it can be converted to nitrogen fertilizer

The combined system:

The system in its entirety is designed for an area with a high concentration of pigs. Ideally, at least 500,000 grow-finish pigs are within a 15 to 20 km radius from the centralized processing plant to minimize transport costs. Other biomass sources such as poultry litter, wood, or municipal waste, can be used to provide additional fuel.

From an energy perspective, the outlined system would process approximately 250 tons of dry fecal material per day, equivalent to an energy input of 58 MW. Presuming an efficiency of 40%, electricity output is 23 MW and based on 8000 h of operation, 186 GWh per year. This is roughly equivalent to the electricity requirement of 20,000 households. If the end product is a liquid fuel such as ethanol, total production is estimated at 23 million liters per year.

The economics of the RE-Cycle system are still under investigation. For the preceding scenario of

500,000 pigs in a radius of 15 to 20 km, the preliminary cost, on a yearly basis, is as follows. The costs of retrofitting existing barns with a belt are estimated at US \$7 to 8 per pig place. This is based on individual farms with 4 barns each holding 1200 pigs and includes the costs of urine processing and feces storage. Transport cost for the feces and zinc-ammonium sulfate are estimated at \$1.50 to \$3.00 per pig place per year. The cost of centrally processing the feces and zinc ammonium sulfate is estimated at \$11 to 12 per pig place. Revenues from fuel, ash, and fertilizer are estimated at \$23 to 28 per pig place. Thus, in the worst-case scenario, the RE-Cycle system will break even, while in the best-case scenario, the net profit will be \$8.50 per pig place per year. This cost picture does not take into consideration any improvement in animal health and performance that may occur, and it does not take into consideration that waste disposal, under current conditions, has a cost associated with it that can be avoided. Presuming that per pig place \$3 in waste disposal costs can be avoided with the RE-Cycle system, the revenue from the RE-Cycle system ranges from \$3 to 11.50 per pig place per year. Please note that, since the RE-Cycle system is not currently operational as a system, these costs and revenues are estimates.

In regions where the density of pigs is insufficient for the RE-Cycle system, land application of manure is typically a viable option. To facilitate this land application and to reduce air emissions, the belt housing system provides several benefits: lower ammonia and odor emissions, and a dry, storable fecal waste stream. The latter is high in phosphorus while urine is high in nitrogen, and thus the belt housing system allows for precision application of nitrogen and phosphorus.